

ACCESSORY SERIES

Your good tool of producing rubber products

VACUUM TYPE CUTTING MACHINE

APPLICATION :

Specially used in trimming flashes of various kinds of cups, packing, oil seals and soft objects can't be held.



◆ MODEL : CUT-V-1 (Standard)

- ◎Output capacity: 15-20pcs/min.
- ◎Finishing range: $\varnothing 10 \sim \varnothing 120 \text{mm}$, $\varnothing 120 \sim \varnothing 200 \text{mm}$
- ◎Two-knives or three knives are available. Adjusting angle from $0^\circ \sim 90^\circ$


Features:

1. To hold objects by vacuum .
2. Upgrade finishing of cured parts and increase value-added.
3. Resolve flashes and make perfect sealing contact face
4. Two-knife or three knife is available. Adjusting angle from $0^\circ \sim 90^\circ$ with high stroke sliding blade.




◆ MODEL : CUT-V-1


- ◎Output capacity: 8-12pcs/min.
- ◎Finishing range: $\varnothing 150 \sim \varnothing 350 \text{mm}$
- ◎One blade for I.D. and one blade for O.D. Adjusting angle from $0^\circ \sim 90^\circ$
- ◎With 2 sets of auxiliary rollers (option).

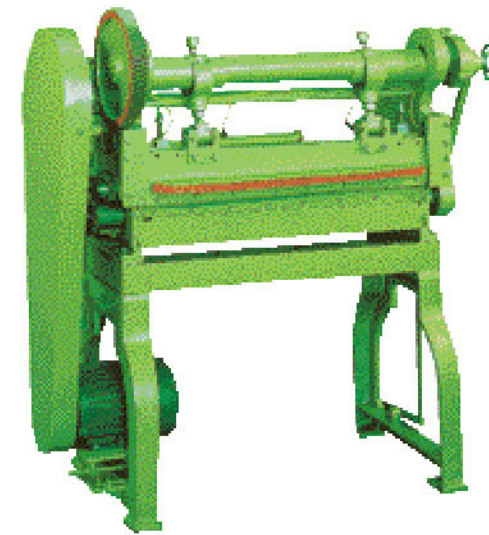

◆ MODEL : PCS-25 AUTOMATIC FEEDING & CUTTING MACHINE

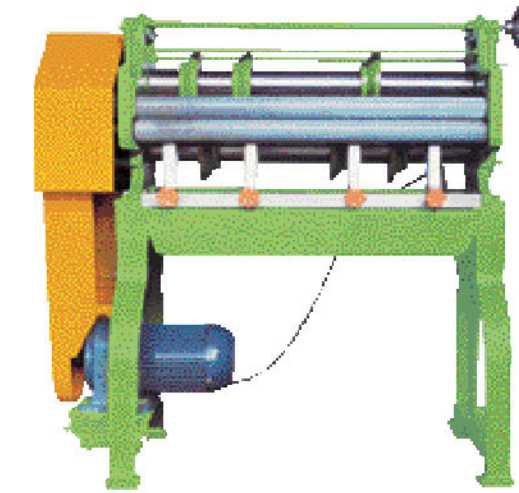

◆ MODEL : SLI-25 RUBBER SLITTING MACHINE

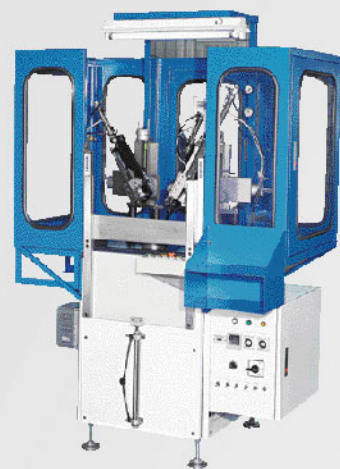


◆ MODEL : CUT-V-1

- ◎Three-knife type (horizontal, I.D. and O.D. knife.)
- ◎Optional: Safety light curtain & safety guarding



◆ MODEL : AUTOCUT-4-SP Automatic rotary four station cutting machine

- ◎Output range: 15-20pcs/min.
- ◎Finishing range: $\varnothing 40 \text{mm}$ (max.)
- ◎One blade for I.D. one blade for O.D. Design subject to finished piece. Disc dia. $\varnothing 300 \sim \varnothing 400$, Cutting angle $0^\circ \sim 65^\circ$

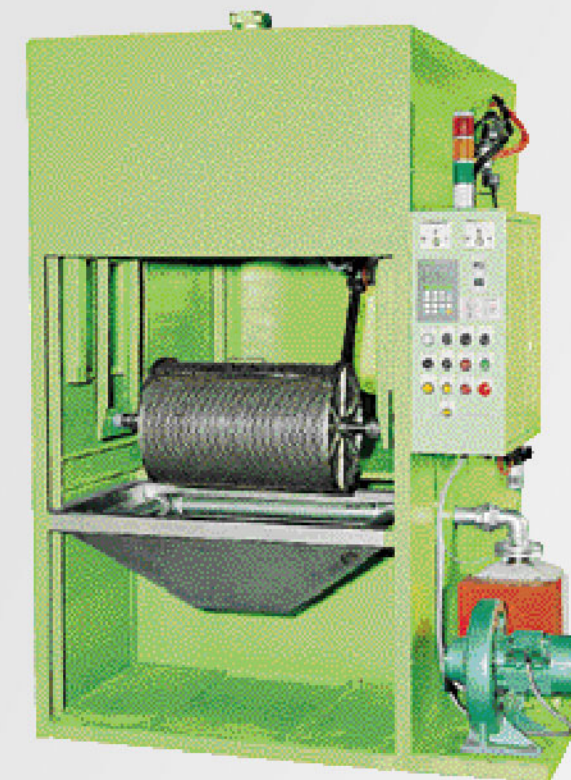

◆ MODEL : HY-SAAF30 HY-SAAF50 SEAL ADHESIVE APPLYING MACHINE

- APPLICATION: Washer and different size of oil seals.
- FEATURES:
 1. Chemical can be adhered on metal very evenly.
 2. Dry quickly.
 3. Automatic or Semi-automatic is available for easy operation.
 4. Adapt the air-drive diaphragm pump for chemical supply.
 5. Roller speed is controlled by inverter.
 6. One operator can handle several machines at the same time.
 7. Easy maintenance.

◆ SPECIFICATION

Model		HY-SAAF30	HY-SAAF50
Capacity per time	kg/times	30kg/times	50kg/times
Heating capacity	kw	7	7
Total Power	kw	8	8
Pressure of air	kg/cm ²	5~7	5~7
Machine Dimension	WxLxH	1.6X1.7X2.25	1.9X1.7X2.25
Machine Weight	kg	2500	2800